



SPECIFICATION

- Heavy duty 4.0 metre (12ft) tracks for site movement
- 1200mm (48") wide belt feeder
- 1000mm (42") wide incline belt—18 metre (62ft) length conveyor
- CAT 75.4 kw Diesel hydraulic engine for tracks and conveyor belts (Optional dual power)
- 7m³ Hopper c/w optional extensions and liners
- Hydraulic raise/lower incline conveyor



7m³ Hopper - *Optional 9m³ and 12m³ Upgrades*




4.0metre (12ft) - 400 Shoe Tracks



Hopper with optional bolt-in liners




Heavy duty - 18 metre (60ft) Incline conveyor

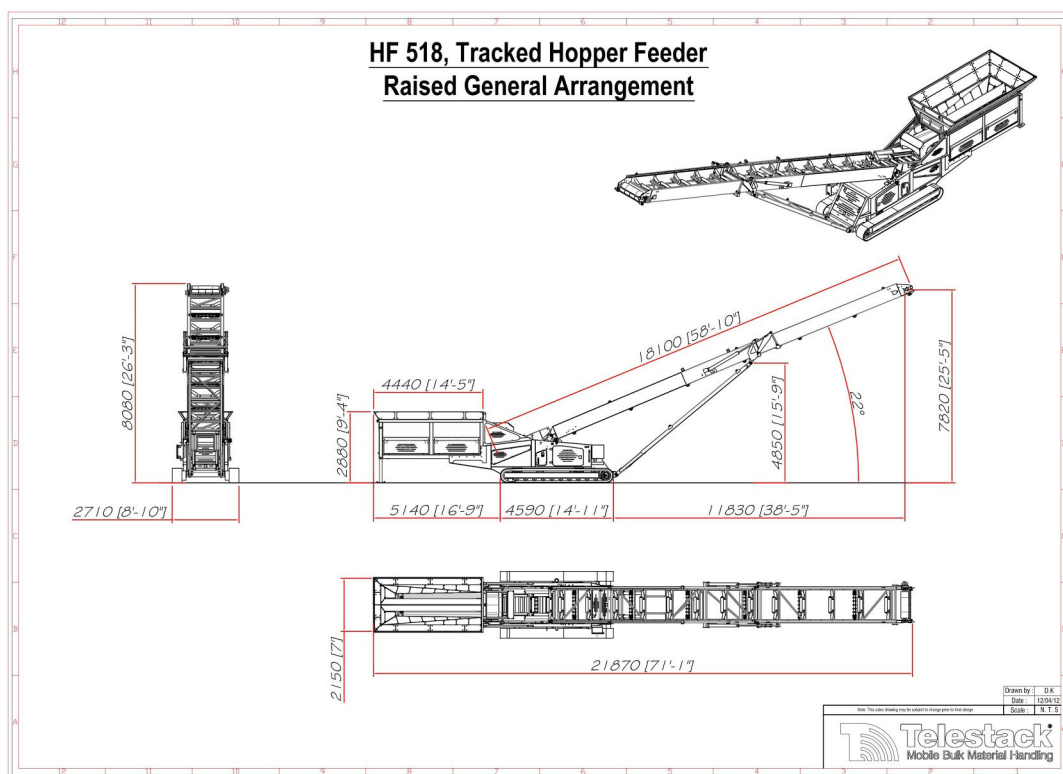

KEY BENEFITS

- Eliminate double handling of material
- Unload directly from wheel loaders/grabs
- Hopper feeder for medium to large wheel loaders
- Much functional unit for stockpiling, feeding Telestack equipment, barge-loading and reclaiming
- Fully mobile independent unit with optional dual power - Electric motor driven

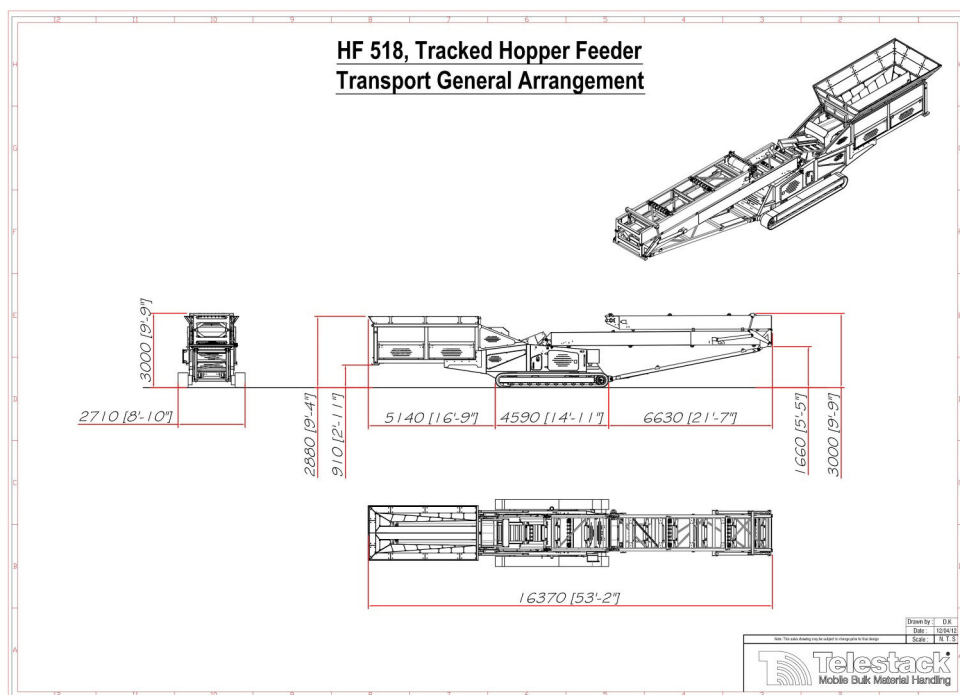

TYPICAL APPLICATIONS

- Stockpiling directly from wheel loaders/grabs
- Loading vessels / barges from wheel loaders or grab cranes.
- Feeding auxiliary Telestack equipment
- Feeding fixed equipment
- Discharging onto overland conveyor systems
- Mobile Reclaim hopper for stacker/reclaimer belt

HF 518 Tracked Hopper Feeder—Transport (1 x RO-RO)

Distributed by:

For Further Information

Telestack Limited

www.telestack.com

Tel: +44 (0) 2882 251100

Email: info@telestack.com

**THE
POWER
TO MOVE
MATERIALS™**